



Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

### ELECTRIC COUNTER TILT SKILLET

Model IECTS-12 12 gallon electric counter tilting skillet

#### CONSTRUCTION

- Satin finish 10 gauge stainless steel pan with polished interior
- Coved corners
- Stainless steel control housing
- Elements are cast embedded into a full 1-1/2" (38mm) aluminum casting clamped below the pan for even heat distribution
- Side pivots for tilting
- Tilting handle with heat proof knob
- Tilt position device permits slight tilting during the cook cycle to aid in grease removal
- Concealed mounting lugs for bolting unit to countertop or stand

#### OPERATION

- Integrally mounted controls
- Power switch
- Thermostat
- Cook indicator light
- High temperature cut-off
- 160-445° F (71-229° C) temperature range

#### CAPACITY

12 gallon (45 litres)

#### STANDARD FEATURES

- Side pivots and tilting handle
- Manual control
- Mounts to countertop
- Standard voltage options
  - 208 VAC, 1 or 3 phase, 50/60 hz
  - 220 VAC, 1 or 3 phase, 50/60 hz
  - 240 VAC, 1 or 3 phase, 50/60 hz
- One year parts and labor warranty



#### OPTIONS AND ACCESSORIES (AT ADDITIONAL CHARGE)

##### Voltage options

- 380 VAC, 3 phase, 50/60 Hz
- 415 VAC, 3 phase, 50/60 Hz
- 220/380 VAC, 4 wire, 50/60 Hz
- 240/415 VAC, 4 wire, 50/60 Hz
- 480 VAC, 3 phase, 50/60 Hz
- 600 VAC, 3 phase, 60 Hz

##### Stands

- 18" (46 mm) high stainless steel stand with sliding shelf
- 18" (46 mm) high stainless steel stand with sliding drawer and stationary drain

##### Faucets

- Single pantry faucet with swing spout
- Double pantry faucet with swing spout

##### Etched markings

- Gallons
- Litres
- Steam pan insert
- Stainless steel lift off cover
- Correctional package



# IECTS | ELECTRIC COUNTER TILT SKILLET

## MAXIMUM INPUT:

IECTS-12      9 kW

## POWER CONNECTION:

Refer to data plate.



## DRAIN CONNECTION:

1-1/4" (32mm) O.D. tube from tray pan

## SHORT FORM SPECIFICATIONS

Provide Intek model IECTS-12, 12 gallon (45 litre) electrically heated counter tilting skillet. The controls shall be integrally mounted in the stainless steel housing and shall include a power switch, thermostat with range of 160-445°F (71-230°C), a cook indicator light and high temperature cut-off. The unit shall have a one-piece covered corner, 10 gauge stainless steel pan with #4 finish exterior and polished interior. Heating shall be accomplished by electric elements cast embedded into a full 1-1/2" (38mm) thick aluminum casting attached to the underside of the pan. The pan shall be mounted on side pivots to allow tilting and shall have a tilting handle with heat proof knob. A tilt position device shall permit the pan to be tilted forward slightly during cooking to aid grease removal. Unit shall have concealed mounting lugs for bolting to a counter top or stand. Provide options and accessories as indicated.

MODEL	kW	PHASE	AMPS PER LINE						
			208V	220V	240V	380V	415V	480V	600V
IECTS-12	9.0	1	43.3	40.9	37.5	N/A	N/A	N/A	N/A
		3	25.0	23.6	21.7	13.7	12.5	10.8	8.7

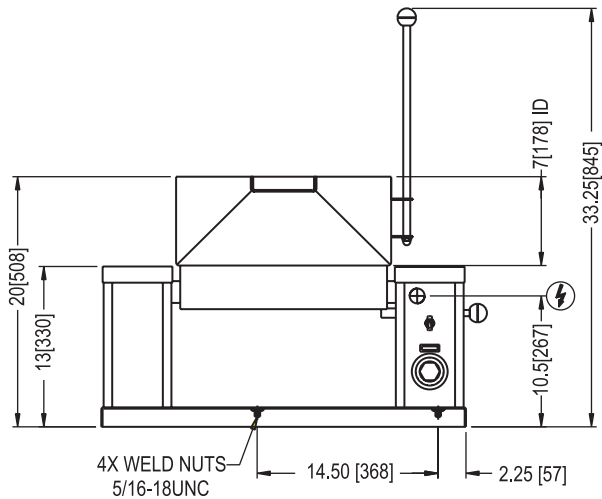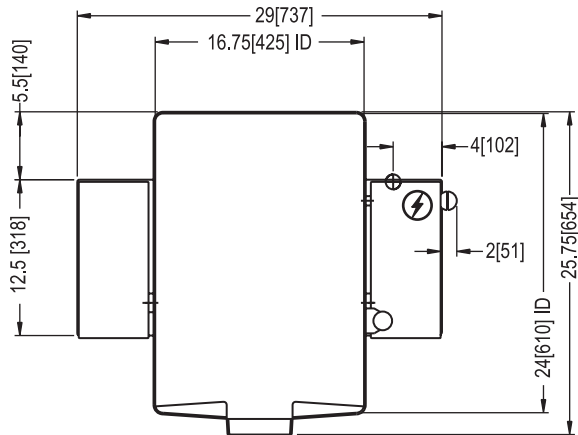

DIMENSIONS ARE IN INCHES [MM]

